


- Contemporary designed round flush-mount speaker baffle.
- Compact 11" diameter is much smaller and less conspicuous than most 8" speaker baffles.
- Ceiling White, non-glare texture with contoured edge matches baffle to mounting surface.
- Molded of U.V. stabilized, high impact polystyrene thermoplastic.
- Recessed screwdriver adjustable 50 ohm wire wound potentiometer. Low profile push-in knob provided

DESCRIPTION

The PI-SGTP 25/70V transformer driven ceiling speaker is designed to be used with telephone systems or paging devices with a 600 ohm audio output

APPLICATIONS

The PI-SGTP 25/70V transformer driven ceiling speaker recommends itself for indoor applications. The intelligibility of this ceiling speaker makes it ideally suited for office environments, department stores, or any location in need of a discreet means of paging. The volume control is recessed, ensuring the added security that only authorized persons can have access to adjusting audio output. The aesthetic finish of the PI-SGTP ceiling speaker makes it suitable for use in places warranting a professional appearance. The intelligibility is exceptional whether for background music or paging.

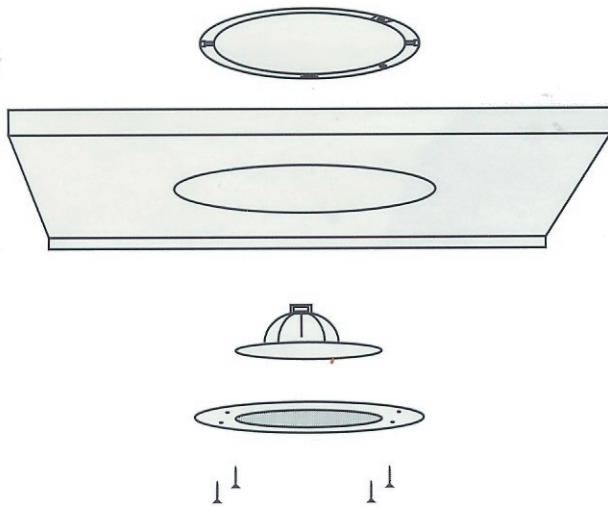

ARCHITECT AND ENGINEERING SPECIFICATIONS

This round flush mount ceiling-speaker includes an 8" diameter cone type loudspeaker. It has four mounting holes on a 9 1/8" diameter circle. The grill is Molded of U.V. stabilized, high impact polystyrene thermoplastic. Ceiling White, non-glare texture with contoured edge matches baffle to mounting surface. Furnished with four #8 x 1 1/2" truss-whitehead sheet metal screws to fasten grill to ceiling mounting device.

TECHNICAL SPECIFICATIONS

Transformer specs:

Power Rating (Watts)	5
Primary Volts	70
Insertion Loss at 1 KHz	0.9 dB
Frequency Response ±1 dB	80 Hz - 20 KHz
Primary Taps (Watts)	5, 2½, 1, ½, ¼
Primary Leads (UL 1007)	6" Color Coded
Secondary Impedance (Ohms)	8
Secondary Leads	3½" Color Coded
Mounting Centers	2"
Weight (Lb.)	0.37

GENERAL SPECIFICATIONS

Grill size
11" diameter

Weight
2 lbs 1.6 oz.

Packing
1 per crtn, 6 per master

MATERIALS:

Powder coated corrosion resistant electrogalvanized 22 gauge steel.

GRILL MOUNTING FASTENERS:

Four #8 x 1 1/2" phillips truss whitehead sheet metal screws.

SPEAKER SIZE:

5 oz., 8" dual cone speaker (7 5/8" diameter magnetic center)

COLOR:

non-glare textured ceiling white.