


## PI-SGTV

5 WATT

25/70V

METAL CEILING SPEAKER  
KNOB VOLUME CONTROL

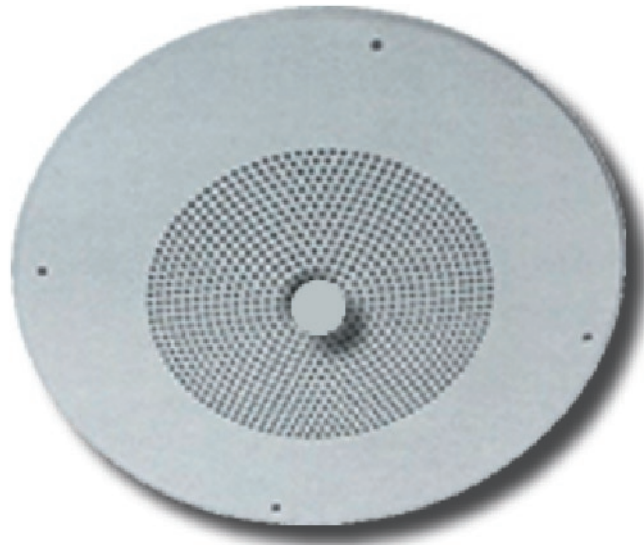


- Rated 5 watt continuous duty
- Sturdy construction.
- Knob volume control.
- 11" diameter round flush mount 22 gauge electro-galvanized steel grill.
- Textured non-glare white powder coat finish blends with most ceiling materials.
- Matching phillips whitehead screws for electric drivers.
- Manufactured and tested under rigid quality requirements.

### DESCRIPTION

The PI-SGT 25/70V transformer driven ceiling speaker is designed to be used with telephone systems or paging devices with a 600 ohm audio output

### APPLICATIONS

The PI-SGT 25/70V transformer driven ceiling speaker recommends itself for indoor applications. The intelligibility of this ceiling speaker makes it ideally suited for office environments, department stores, or any location in need of a discreet means of paging. The volume control is recessed, ensuring the added security that only authorized persons can have access to adjusting audio output. The aesthetic finish of the PI-SGT ceiling speaker makes it suitable for use in places warranting a professional appearance. The intelligibility is exceptional whether for background music or paging.

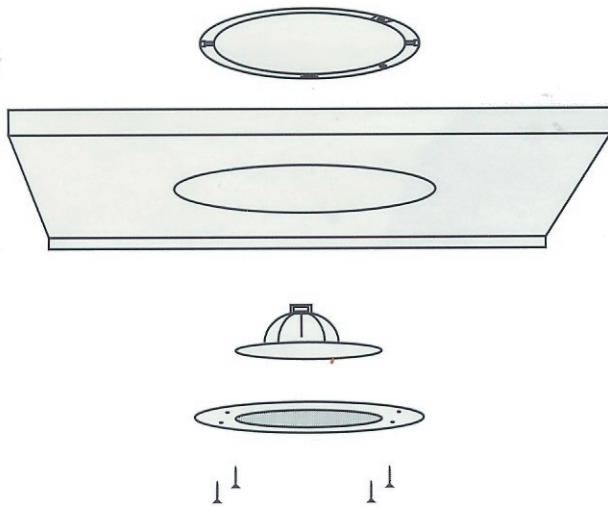

**ARCHITECT AND ENGINEERING SPECIFICATIONS**

This round flush mount ceiling-speaker includes an 8" diameter cone type loudspeaker. It has four mounting holes on a 9 1/8" diameter circle. The grill is constructed of 22 gauge electro-galvanized corrosion resistant steel with non-glare textured ceiling white powder coat finish on the face part. Furnished with four #8 x 1 1/2" truss-whitehead sheet metal screws to fasten grill to ceiling mounting device.

**TECHNICAL SPECIFICATIONS**

*Transformer specs:*

<i>Power Rating (Watts)</i>	5
<i>Primary Volts</i>	70
<i>Insertion Loss at 1 KHz</i>	0.9 dB
<i>Frequency Response ±1 dB</i>	80 Hz - 20 KHz
<i>Primary Taps (Watts)</i>	5, 2½, 1, ½, ¼
<i>Primary Leads (UL 1007)</i>	6" Color Coded
<i>Secondary Impedance (Ohms)</i>	8
<i>Secondary Leads</i>	3½" Color Coded
<i>Mounting Centers</i>	2"
<i>Weight (Lb.)</i>	0.37

**GENERAL SPECIFICATIONS**

*Grill size*  
11" diameter

*Weight*  
2 lbs 1.6 oz.

*Packing*  
1 per crtn, 6 per master

**MATERIALS:**

Powder coated corrosion resistant electrogalvanized 22 gauge steel.

**GRILL MOUNTING FASTENERS:**

Four #8 x 1 1/2" phillips truss whitehead sheet metal screws.

**SPEAKER SIZE:**

5 oz., 8" dual cone speaker (7 5/8" diameter magnetic center)

**COLOR:**

non-glare textured ceiling white.